
MDTE Series
Wire Wound Molded SMD Power Inductors
Size 1513




FEATURES


- [illegible]
- [illegible]
- [illegible]
- [illegible]
- [illegible]
- [illegible] ℃ [illegible]
- [illegible]

APPLICATION


- [illegible]
- [illegible]

Dimensions: [mm]

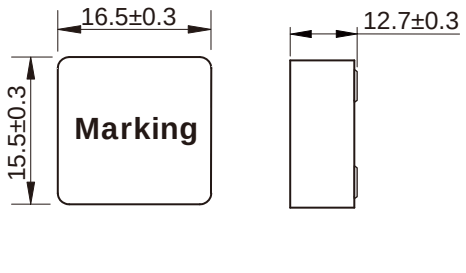



Land Pattern: [mm]



Electrical Properties:

Part No	Inductance @ 100KHz/0.1V	Tolerance	Current Typ.	Current Max.	Temperature Rise Current Typ.	DC Resistance Max.

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com


Soldering Reflow:

Packaging Information:

Tape Dimension:

Series	A0 (mm)	B0 (mm)

Peel force of top cover tape:

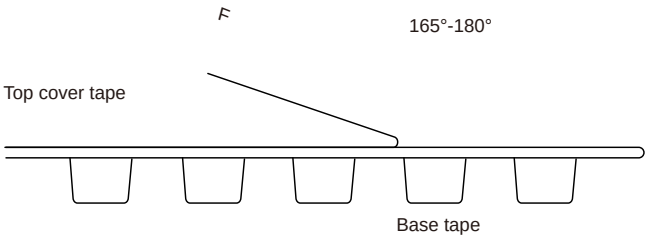

Reel Dimension：[mm]



Packaging Quantity: