MDTE Series
Wire Wound Molded SMD Power Inductors
Size 6060



FEATURES


-
-
-
-
-
-
-

℃


APPLICATION

-
-

Dimensions: [mm]

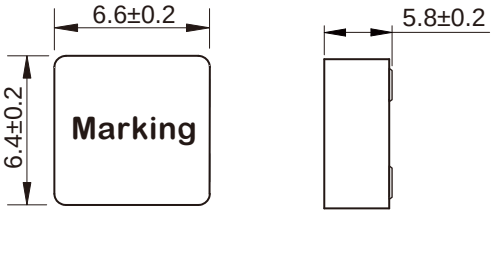

Land Pattern: [mm]



Electrical Properties:

	10					

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com


Soldering Reflow:

Packaging Information:

Tape Dimension:


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)71.79 l412
MDTE6060	7.0±0.1	6.8±0.1	1.5±0.1	4.0±0.1	12.0±0.1	16.0±0.3	6.3±0.1	1.75±0.1	0.35±0.05

Peel force of top cover tape:

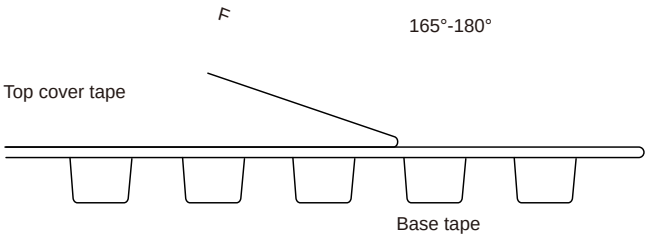

The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension：[mm]

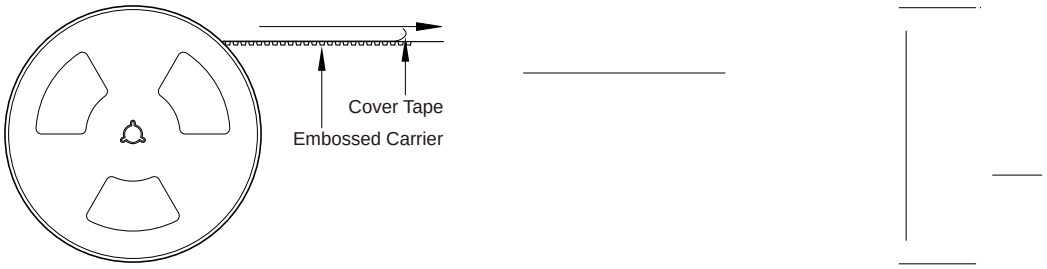

Packaging Quantity: