**SCM Series**
Common Mode Filter
Size 3216


Dimensions: [mm]





Schematic:


Electrical Properties:

# Typical Electrical Characteristics:

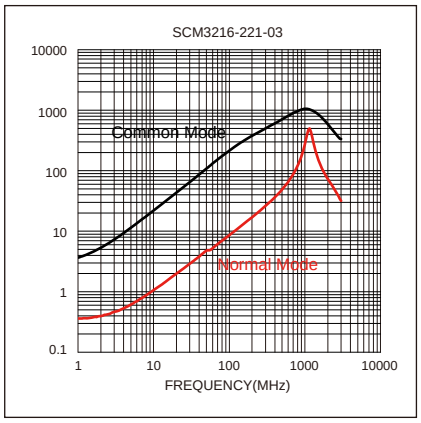
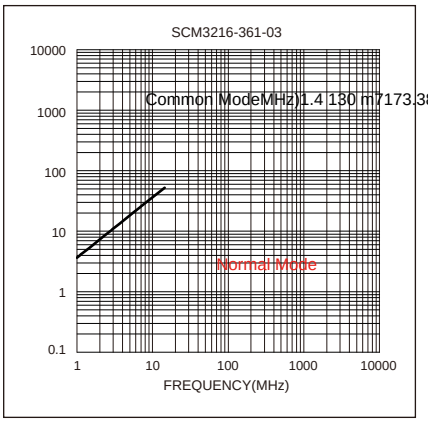
## Soldering Reflow:

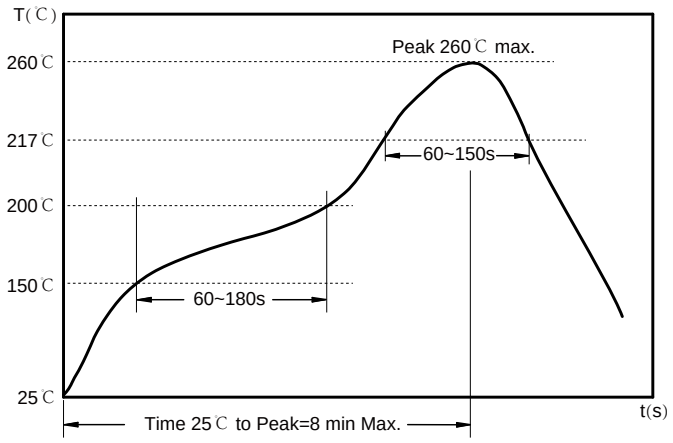


Preheat condition: 150 ~200℃/ 60~180 sec.

Allowed time above 217℃: 60~150 sec.


Max temperature: 260℃.

## Packaging Information:

Tape Dimension:


| Series | A0 (mm) | B0 (mm) | D (mm) | P0 (mm) | P1 (mm) | W (mm) | K0 (mm) | E (mm) | T (mm) |
|---|---|---|---|---|---|---|---|---|---|
| SCM3216 | 1.88 typ. | 3.50 typ. | 1.5±0.1 | 4.0±0.1 | 4.0±0.1 | 8.0±0.3 | 2.1 typ. | 1.75±0.1 | 0.22±0.1 |

## Peel force of top cover tape:

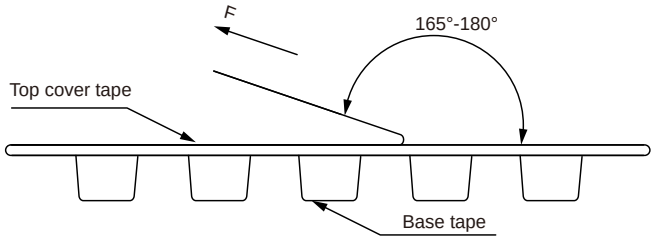



The peel force of top cover tape shall be between 0.1 to 1.0 N

## Reel Dimension：[mm]

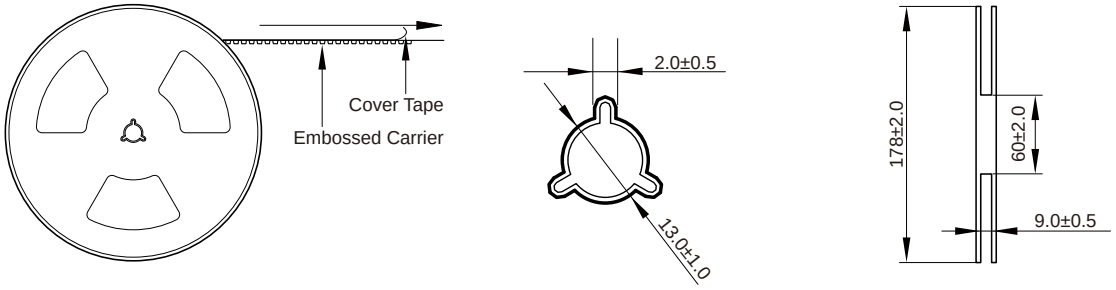


## Packaging Quantity:

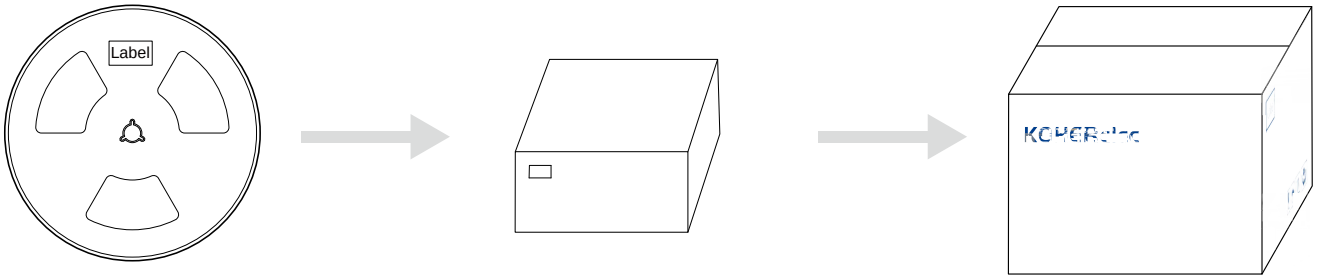


2000 Pcs/Reel

5 Reel /Inner box( 10K Pcs)

8 Inner box/Carton box(80K Pcs)

## Cautions and Warnings:

### Storage Conditions:

- 
- 
- 

### Operation Instructions: