SMD Wire Wound Ceramic Inductor
Size 0402

- Wire wounded with high Q and high SRF
- More stable due to ceramic design
- Small size and small tolerance available
- Quan ty: 10000pcs

- HF applica on

Dimensions: [mm]




Land Pattern: [mm]

Electrical Properties:

| | | |
|---|---|---|
| | 0.080 | 5.40 |
| | 0.065 | 5.40 |
| | 0.070 | 5.00 |
| | 0.080 | |

# Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

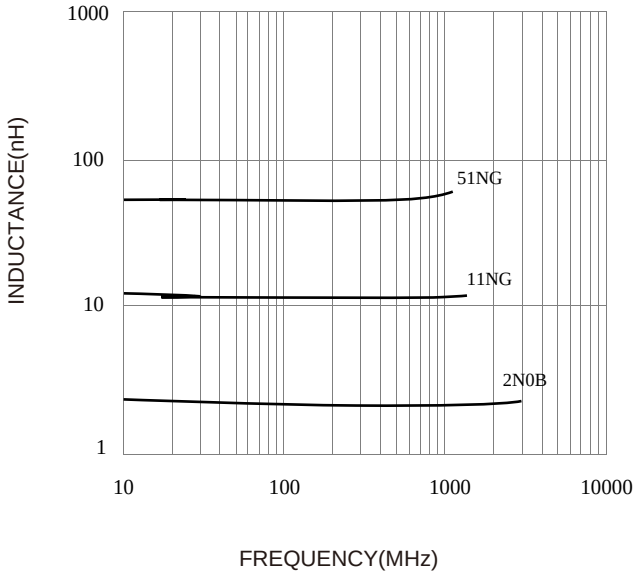


Temperture Rise VS. Frequency Characteristics:

